


Subsea Cable End Seal

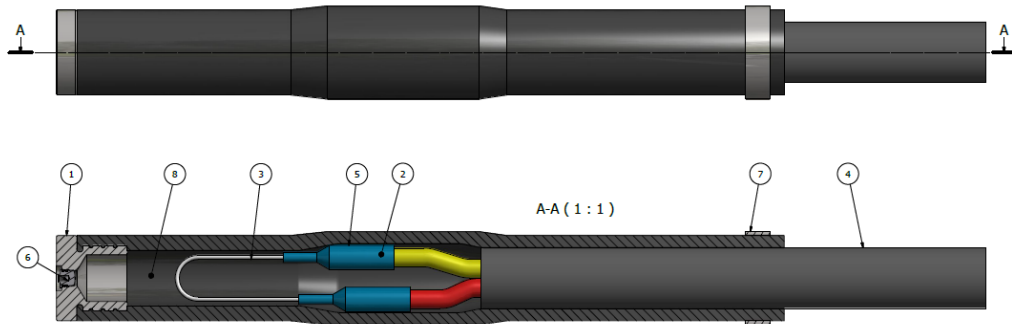

Features:

- Cable End termination seal for temporarily storage of Electrical Cable or Fibre Optic umbilical located at the sea bottom
- Based upon knowledge of long time subsea termination technology
- Qualified Rubber components.
- Standard exposed metal: Titanium grade 2
- Cable diameter range from 12mm to 35mm
- Pressure compensated up to 450 bars
- Storage temperature: -40 to + 70 deg. Centigrade.
- Custom designs available.

Typical Applications:

- Instrumentation
- Workover systems
- Umbilical termination